


Specifications

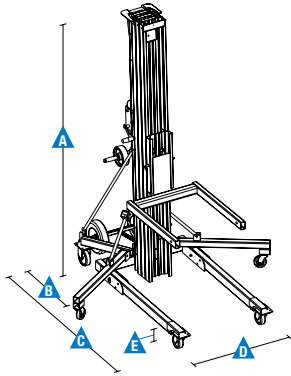

| Models | SLC-12 | | SLC-18 | | SLC-24 | |
|-------------------------------|--------|-------------|--------|-------------|--------|-------------|
| Measurements | Metric | US | Metric | US | Metric | US |
| Working height: | | | | | | |
| standard forks - forks down | 3.40 m | 11 ft 2 in | 5.10 m | 16 ft 9 in | 6.78 m | 22 ft 3 in |
| standard forks - forks up | 3.94 m | 12 ft 11 in | 5.64 m | 18 ft 6 in | 7.32 m | 24 ft |
| adjustable forks - forks down | 3.40 m | 11 ft 2 in | 5.10 m | 16 ft 9 in | 6.78 m | 22 ft 3 in |
| adjustable forks - forks up | 3.94 m | 12 ft 11 in | 5.64 m | 18 ft 6 in | 7.32 m | 24 ft |
| boom* | 3.70 m | 12 ft 2 in | 5.41 m | 17 ft 9 in | 7.10 m | 23 ft 3 in |
| A Height - stowed | 2.18 m | 7 ft 2 in | 2.18 m | 7 ft 2 in | 2.18 m | 7 ft 2 in |
| B Length - stowed | 86 cm | 2 ft 10 in | 86 cm | 2 ft 10 in | 86 cm | 2 ft 10 in |
| A - operating | 1.60 m | 5 ft 3 in | 1.85 m | 6 ft 1 in | 2.06 m | 6 ft 9 in |
| A Width - stowed** | 80 cm | 2 ft 7.5 in | 80 cm | 2 ft 7.5 in | 80 cm | 2 ft 7.5 in |
| - with stabilizers lowered | 1.68 m | 5 ft 6 in | 1.68 m | 5 ft 6 in | 1.68 m | 5 ft 6 in |

Productivity

Load capacity:

| | | | | | | |
|----------------------------|--------|---------|--------|---------|--------|---------|
| 14 in (36 cm) load center | 295 kg | 650 lbs | 295 kg | 650 lbs | 295 kg | 650 lbs |
| 24 in (61 cm) load center | 193 kg | 425 lbs | 193 kg | 425 lbs | 193 kg | 425 lbs |
| 42 in (107 cm) load center | 82 kg | 180 lbs | 73 kg | 160 lbs | 73 kg | 160 lbs |
| A Ground clearance | 5 cm | 2 in | 5 cm | 2 in | 5 cm | 2 in |
| Load height minimum | 15 cm | 6 in | 15 cm | 6 in | 15 cm | 6 in |
| Front casters | 10 cm | 4 in | 10 cm | 4 in | 10 cm | 4 in |
| Rear casters | 13 cm | 5 in | 13 cm | 5 in | 13 cm | 5 in |

Power

Average cranks:

| | | | |
|----------------|----------------------------|----------------------------|----------------------------|
| standard winch | 27.8 cranks/m8.5 cranks/ft | 27.8 cranks/m8.5 cranks/ft | 27.8 cranks/m8.5 cranks/ft |
|----------------|----------------------------|----------------------------|----------------------------|

Weight

| | | | | | | |
|----------|--------|---------|--------|---------|--------|---------|
| Standard | 102 kg | 225 lbs | 139 kg | 307 lbs | 157 kg | 347 lbs |
|----------|--------|---------|--------|---------|--------|---------|

Standards Compliance

EU Directive: 2006/42/EC (Machinery)

Load Handling Attachments

| Measurements | Metric | US | Weight - Metric | Weight - US |
|--|----------------|-------------------|-----------------|-------------|
| Standard forks (l/w/d)*** | 71/58/6 cm | 28/23/2.5 in | 12 kg | 26.5 lbs |
| Adjustable forks (l/w/d)*** | 70/30-76/6 cm | 27.5/12-30/2.5 in | 24 kg | 52.5 lbs |
| Fork extensions detached (each) (l/w/d)*** | 76/5/8 cm | 30/2/3 in | 2 kg | 4.5 lbs |
| Fork extensions attached (each) (l/w/d)*** | 64/5/8 cm | 25/2/3 in | 2 kg | 4.5 lbs |
| Boom (l/w/d)*** | 46-107/4/15 cm | 18-42/1.5/6 in | 18 kg | 39.9 lbs |
| Load platform (l/w/d)*** | 67/58/6 cm | 26.3/23/2.5 in | 14 kg | 31.5 lbs |

* Measured from ground to bottom of shackle.

** Outside dimensions.

*** Length/Width/Depth.

Features

Standard Features

Measurements

SLC™ -12

- 3.94 m (12 ft 11 in) maximum lifting height
- Up to 295 kg (650 lbs) lift capacity

SLC-18

- 5.64 m (18 ft 6 in) maximum lifting height
- Up to 295 kg (650 lbs) lift capacity

SLC-24

- 7.32 m (24 ft) maximum lifting height
- Up to 295 kg (650 lbs) lift capacity

Productivity

- Heavy-duty design
- Strong, lightweight aluminum telescoping mast with mast brake
- Quick set up requires no tools
- Interchangeable load handling attachments
- Rear transport wheel assembly
- Glide rails allow easy loading and unloading, on or off a vehicle, for transport
- Hold-down bar secures mast assembly during transport

Power

- One speed manual winch

Easily Configured To Meet Your Needs

Productivity & Fork Options

- Standard forks
- Adjustable forks
- Fork extensions
- Boom
- Pipe cradle⁽¹⁾
- Load platform

Power Options

- One speed manual winch (standard)
- Two speed manual winch⁽¹⁾

Base Options

- Standard base
- Standard mast brake
- Stabilizer set (standard on SLC-18, -24)

Wheels & Casters

- Non-marking 10 cm (4 in) front casters (standard)
- Non-marking 13 cm (5 in) rear casters (standard)
- Side brakes (standard)

Options & Accessories

Productivity

- Adjustable forks
- Fork extensions
- Boom
- Pipe cradle⁽¹⁾
- Load platform
- Stabilizer set (option on SLC-12)

Power

- Two speed manual winch⁽¹⁾



⁽¹⁾ Available aftermarket only



CO.MA.CO S.r.l.

via XIV Strada 21 - 20020 Cesate (MI) - Italy

Tel. +39 02 99065169

info@comacopro.com

www.comacopro.com