

### Specifications

Models	GS-1530		GS-1532		GS-1930		GS-1932	
Measurements	US	Metric	US	Metric	US	Metric	US	Metric
Working height maximum - indoor <sup>1</sup>	21 ft 1 in	6.61 m	21 ft 1 in	6.61 m	25 ft 3 in	7.85 m	25 ft 3 in	7.85 m
- outdoor <sup>1</sup>	19 ft 6 in	6.11 m	18 ft 8 in	5.87 m	20 ft 8 in	6.47 m	20 ft 8 in	6.47 m
<b>A</b> Platform height maximum - indoor	15 ft 1 in	4.61 m	15 ft 1 in	4.61 m	19 ft 3 in	5.85 m	19 ft 3 in	5.85 m
- outdoor	13 ft 6 in	4.11 m	12 ft 8 in	3.87 m	14 ft 8 in	4.47 m	14 ft 8 in	4.47 m
<b>B</b> Platform height stowed	3 ft 4 in	1.01 m	3 ft 4 in	1.01 m	3 ft 5 in	1.04 m	3 ft 5 in	1.04 m
<b>C</b> Platform length - outside	5 ft 5 in	1.66 m	5 ft 5 in	1.66 m	5 ft 5 in	1.66 m	5 ft 5 in	1.66 m
- extended	8 ft 5 in	2.55 m	8 ft 5 in	2.55 m	8 ft 5 in	2.55 m	8 ft 5 in	2.55 m
Roll-out platform extension deck	3 ft	0.91 m	3 ft	0.91 m	3 ft	0.91 m	3 ft	0.91 m
<b>D</b> Platform width - outside	29.9 in	0.76 m	29.9 in	0.76 m	29.9 in	0.76 m	29.9 in	0.76 m
Guardrail height	3 ft 7 in	1.1 m	3 ft 7 in	1.1 m	3 ft 7 in	1.1 m	3 ft 7 in	1.1 m
Toeboard height	6 in	15 cm	6 in	15 cm	6 in	15 cm	6 in	15 cm
<b>A</b> Height-stowed - folding rails	6 ft 11 in	2.12 m	6 ft 11 in	2.12 m	7 ft 1 in	2.16 m	7 ft 1 in	2.16 m
- rails folded	5 ft 8 in	1.72 m	5 ft 8 in	1.72 m	5 ft 11 in	1.80 m	5 ft 11 in	1.80 m
<b>F</b> Length-stowed	6 ft	1.83 m	6 ft	1.83 m	6 ft	1.83 m	6 ft	1.83 m
Length-stowed extended	8 ft 11 in	2.74 m	8 ft 11 in	2.74 m	8 ft 11 in	2.74 m	8 ft 11 in	2.72 m
<b>G</b> Width	2 ft 6 in	0.76 m	2 ft 8 in	0.82 m	2 ft 6 in	0.76 m	2 ft 8 in	0.82 m
<b>A</b> Wheelbase	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m
<b>A</b> Ground clearance - center	3.2 in	8 cm	3.2 in	8 cm	3.2 in	8 cm	3.2 in	8 cm
- with pothole guards deployed	0.9 in	2.3 cm	0.9 in	2.3 cm	0.9 in	2.3 cm	0.9 in	2.3 cm

### Productivity

Maximum platform occupancy (in/out)	2/1		2/1		2/1		2 / 1	
Lift capacity	600 lbs	272 kg	600 lbs	272 kg	500 lbs	227 kg	500 lbs	227 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive height	full height		full height		full height		full height	
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability - stowed <sup>2</sup>	25%		25%		25%		25%	
Turning radius - inside	zero		zero		zero		zero	
Turning radius - outside	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m
Raise / lower speed	21 / 22 sec		21 / 22 sec		26 / 22 sec		26 / 22 sec	
Tilt sensor activation - front to back	3°		3°		3°		3°	
- side to side	1.5°		1.5°		1.5°		1.5°	

### Controls

proportional

### Drive

Hydraulic drive: dual hydraulic, front wheel

E-drive: dual AC electric drive, front wheel

### Brakes

Hydraulic drive: dual hydraulic, rear wheel

E-drive: dual AC electric drive, front wheel

Tires - solid non-marking	12 x 4.5 in	30.5 x 11.5 cm	12 x 4.5 in	30.5 x 11.5 cm	12 x 4.5 in	30.5 x 11.5 cm	12 x 4.5 in	30.5 x 11.5 cm
---------------------------	-------------	----------------	-------------	----------------	-------------	----------------	-------------	----------------

### Power

#### Power source

24 V DC (four 6 V batteries)

#### Hydraulic system capacity

Hydraulic drive: 3.8 gal / 14.2 L


E-drive: 1 gal / 3.8 L

### Weight<sup>3</sup> / Floor Loading<sup>4</sup>

Weight - ANSI, CSA, CE	2,739 lbs	1,242 kg	2,761 lbs	1,252 kg	3,209 lbs	1,456 kg	2,929 lbs	1,329 kg
Tire load, maximum	1,322 lbs	600 kg	1,322 lbs	600 kg	1,460 lbs	662 kg	1,435 lbs	651 kg
Tire contact pressure	147 psi	1,013 kPa	147 psi	1,013 kPa	162 psi	1,118 kPa	159 psi	1,099 kPa
Occupied floor pressure	254 psf	12.17 kPa	254 psf	12.17 kPa	284 psf	13.6 kPa	244 psf	11.69 kPa

### Standards Compliance

ANSI A92.20, CSA B354.6, CE EN280, AS 1418.10

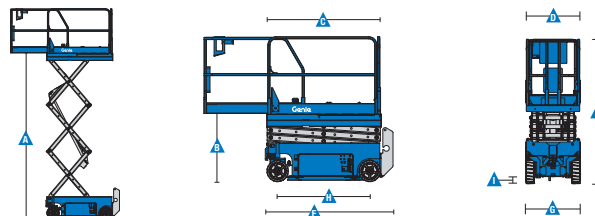

<sup>1</sup> The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

<sup>2</sup> Gradeability applies to driving on slopes, see operator's manual for details regarding slope ratings.

<sup>3</sup> Weight will vary depending on options and/or country standards.

<sup>4</sup> Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.

### Features

#### Standard Features

##### Measurements

###### GS-1530

- 21 ft 1 in (6.61 m) working height
- Up to 600 lbs (272 kg) lift capacity

###### GS-1532

- 21 ft 1 in (6.61 m) working height
- Up to 600 lbs (272 kg) lift capacity

###### GS-1930

- 25 ft 3 in (7.85 m) working height
- Up to 500 lbs (227 kg) lift capacity

###### GS-1932

- 25 ft 3 in (7.85 m) working height
- Up to 500 lbs (227 kg) lift capacity

##### Productivity

- 64 x 29 in (1.63 x .74 m) steel platform
- Folding rails with half-height swing gate
- 36 in (.91 m) extension deck
- Drive at full height
- Dual front wheel drive
- SmartLink™ - dual zone control
- Proportional lift and drive
- Platform load sense system
- Platform control guard
- Universal 27A smart charger
- Rear recessed charger receptacle
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual hydraulic brake release
- Swing-out component trays
- Solid non-marking tires
- Pothole guards

#### Standard Features

##### Productivity (continued)

- Tilt level sensor with audible alarm
- Dual flashing LED beacons
- Side & rear forklift pockets
- Maintenance free steel diamond plate platform
- Descent alarm
- Electronic horn
- Hour meter
- Motion alarm
- Tech Pro™ Link compatible

##### Power

- 24 V DC (four 6 V batteries)



#### Options & Accessories

##### Productivity Options

- Air line to platform
- Automotive horn\*
- Biodegradable hydraulic fluid
- Lift Tools™ Pipe Cradle
- Lift Tools Panel Cradle
- Lift Tools Work Tray
- Lift Guard™ Contact Alarm
- Lift Connect™ Telematics
- XH (GS-1932) Full Outdoor Height

##### Power Options

- E-drive (AC electric drive system)
- Power inverter (120 V/60 Hz)<sup>1</sup>
- EE rating
- AGM maintenance-free batteries
- Drive cutout while charging

<sup>1</sup> Not available with EE rating

#### Genie United States

6464 185th Ave. NE  
Redmond, WA 98052  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By:



Effective Date: October, 2020. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2020 Terex Corporation.